

# 故障APの交換

## 1. Maintain→Device Replace→「Auto Sync」の状態を確認

The screenshot shows the Cloudnet interface with the 'Device Replace' page selected. The 'Auto Sync' toggle is turned on and highlighted with a red box. Below it, a table lists device information. The 'Device State' column for the first entry is 'Offline', which is also highlighted with a red box.

Device Name	Device Type	Device SN	Device Model	Device Version	Device State	Last Cfg Upload At	Cfg Sync At	Actions
WA538-JP	Cloud AP	219801A2959199G0000J	WA538-JP	Release 2449P12	Offline	2023-09-11 11:36:36	2023-09-11 11:36:36	[Refresh] [Auto Sync] [Auto Delete] [Auto Sync Time] [Replace AP]


旧APのConfigは保存されている事を確認

## 2. 対象APの アイコンをクリック


The screenshot shows the Cloudnet interface with the 'Device Replace' page selected. The 'Auto Sync' toggle is turned on. Below it, a table lists device information. The 'Device State' column for the first entry is 'Offline', which is highlighted with a red box. In the 'Actions' column, the 'Replace AP' icon is also highlighted with a red box.

Device Name	Device Type	Device SN	Device Model	Device Version	Device State	Last Cfg Upload At	Cfg Sync At	Actions
WA538-JP	Cloud AP	219801A2959199G0000J	WA538-JP	Release 2449P12	Offline	2023-09-11 11:36:36	2023-09-11 11:36:36	[Refresh] [Auto Sync] [Auto Delete] [Auto Sync Time] [Replace AP]

## 3. 「Register New Device & Replace」を選択し、「Next」をクリック

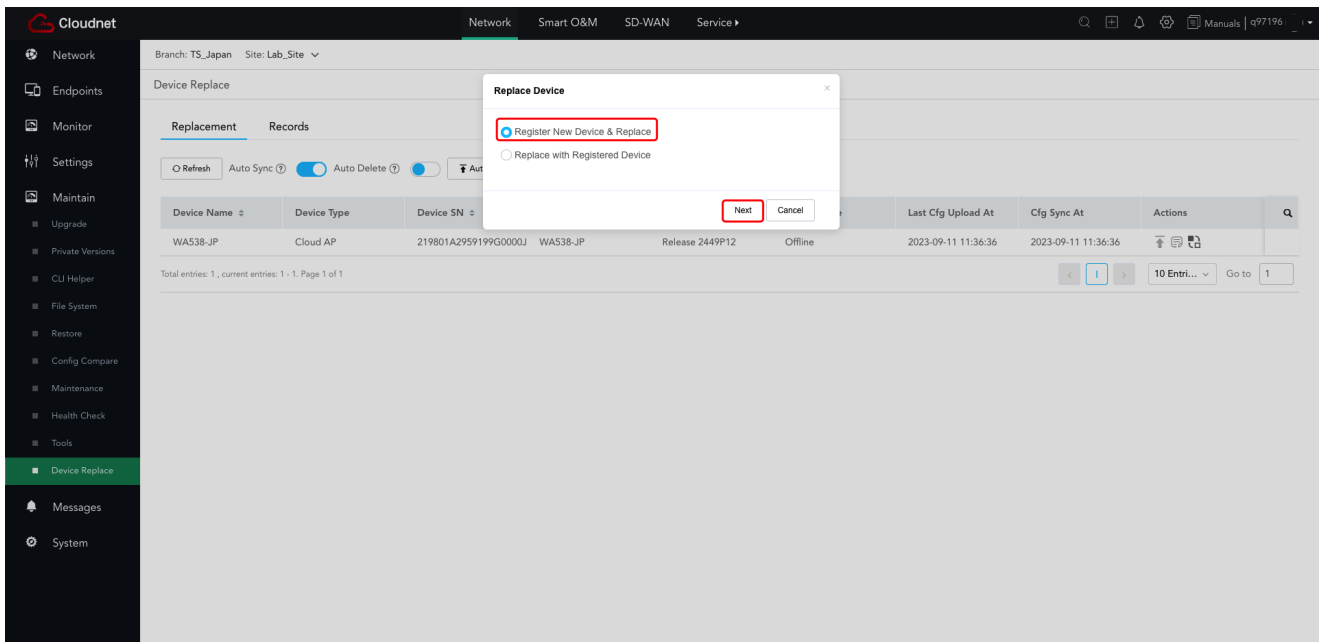


#### 4.新APのSNを記入し、「OK」をクリック

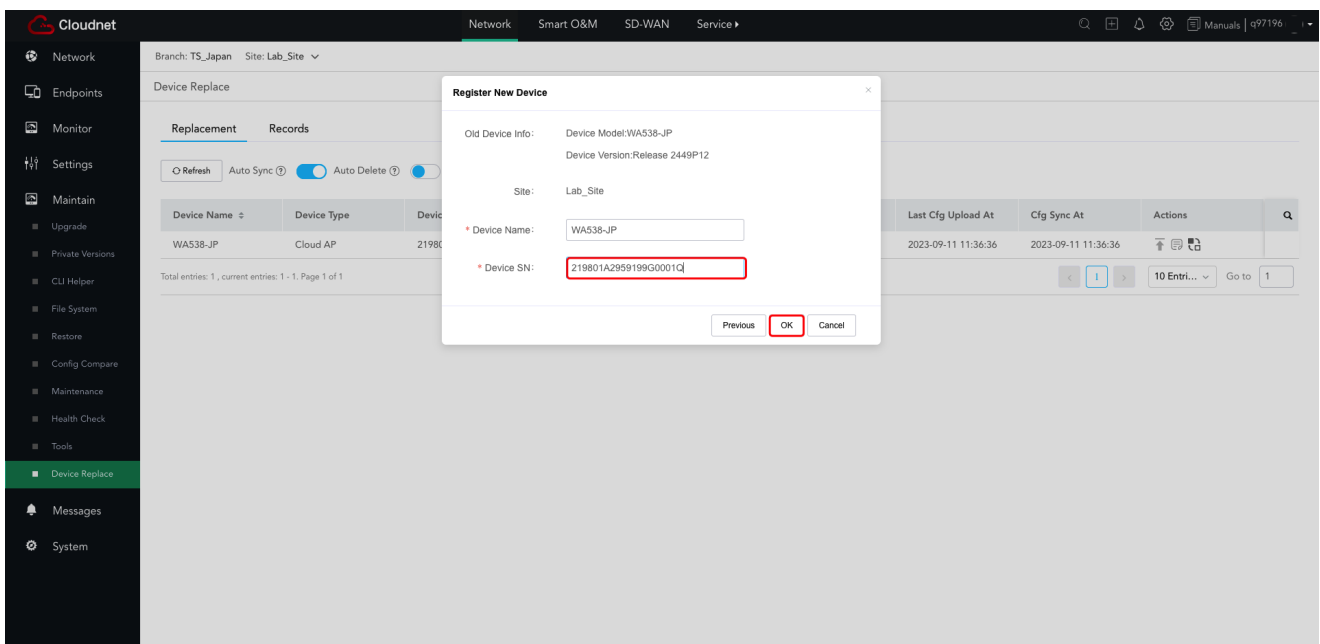


新APに設定を投入する必要は有りません

#### 5.交換を完了

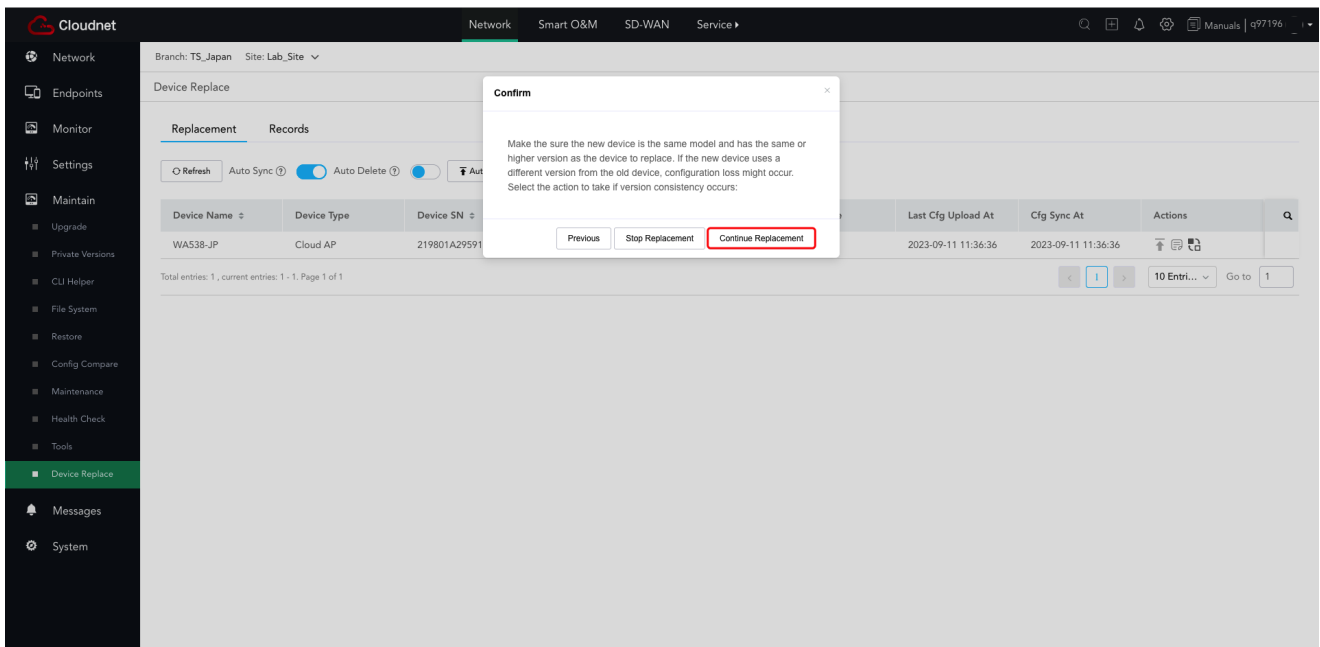

## 6. 「Refresh」をクリックし、最新情報を確認

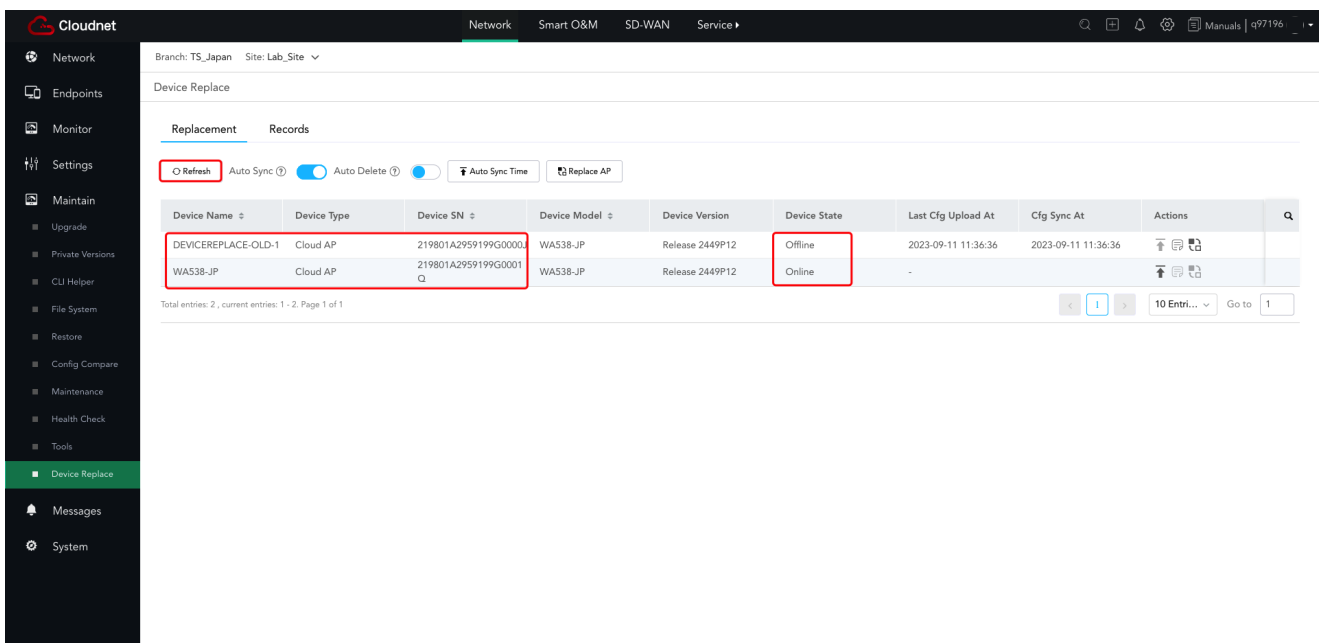

## 7. 「Records」をクリックし、交換結果を確認

Cloudnet Network Smart O&M SD-WAN Service

Branch: TS\_Japan Site: Lab\_Site

Device Replace

Replacement Records

Old Device	Old Device SN	New Device	New Device SN	Replaced At	Replacement State	Reason
DEVICEREPLACE-OLD-1	219801A2959199G0000J	WA538-JP	219801A2959199G0001Q	2023-09-11 13:11:44	Succeeded	-

Total entries: 1, current entries: 1 - 1. Page 1 of 1

10 Entri... Go to 1

## 8. 交換後の動作確認

Cloudnet Network Smart O&M SD-WAN Service

AP List>WA538-JP

State Event Client Tools

Basic Info

- Name: WA538-JP
- AP Model: WA538-JP
- Online State: **Online**
- Local IP: 192.168.100.97
- Serial Number: 219801A2959199G0001Q
- Version: Release 2449P12
- Uptime: 24m24s
- Memory Usage: -
- Public IP: 221.187.214.107
- AP MAC: f474-880b-5540
- SSID: **H3C\_WIFI\_1**
- Associated At: **2023-09-11 14:11:48**
- CPU Usage: -
- Alarms: N/A

Channel Info

2.4GHz-1			5GHz-1			5GHz-2		
Channel	Channel Usage	Power	Channel	Channel Usage	Power	Channel	Channel Usage	Power
6	-	17dBm	52	-	15dBm	100	-	22dBm

CPU and Memory Usage Trends

No data